

# NEXUS SE





# **NEXUS** SE | **Dual Fuel**



BLACK STAINLESS STEEL SLATE IVORY

#### Trim: Satin Chrome

### KEY FEATURES

- 3 Ovens:
  - **LH** Programmable, multifunctional oven
  - RHB Fan oven
  - RHT Slow cook oven (80 140°)
- Telescopic runners 2 shelves both ovens
- Rapid Response™
- Separate deluxe glide-out™ grill with 4-way trivet (dual-circuit)
- Seamless hob with three spill areas and five burners, including a multi-ring burner, semi-gloss cast-iron pan supports, a wok cradle and a multizone with two ceramic zones and a flat, aluminium griddle
- Door-width handles / towel rails











SPECIFICATIONS - DUAL FUEL	MODEL
	NEXUS SE 110
HOB FUEL TYPE	GAS (DF)
PRODUCT CODE	NEXSE110DF
WIDTH (mm)	1092
HEIGHT TO HOTPLATE ( mm) MIN/MAX	905 / 930
DEPTH EXCLUDING/INCLUDING HANDS ( mm)	608 / 648
WEIGHT (KG – UNPACKED)	147
HOB RATINGS	1 X 3.8 - 15.2MJ«
MJ - MEGAJOULES - GAS	1 X 3.0 - 12.3MJ
« MULTI RING BURNER	2 X 1.55 - 6.2MJ
	1 x 0.82 - 3.7MJ
TOTAL MJ RATING	43.60
ELECTRICAL RATING MULITZONE HOB 230V (kW)	2.20 (2 X 1.10)
RATED CONNECTED LOAD (kW) @230V	11.8
RATED CONNECTED LOAD (AMPS)	52.00
THREE-PHASE CONNECTION (AMPS)	3 X 18
ELECTRICAL CONNECTION (AMPS)#	40#
MAXIMUM ELECTRICAL LOAD ( kW @ 230V))	11.80
GRILL POWER RATING ( kW)	2.3
SEPARATE GRILL	GLIDE-OUT™ (TELESCOPIC)
OVEN TEMPERATURE °C MAX	240 °C
DIMENSIONS – LH OVEN (W xHxD)	466 X 434 X 359
CAPACITY – LH OVEN (LITRES)	79
DIMENSIONS – RH OVEN (W xHxD)	466 X 434 X 359
CAPACITY – RH OVEN (LITRES)	79
OVEN SHELVES (+1 = PLATE RACK)	L: 2 FLAT / R: 2 FLAT
PAN SUPPORT MATERIAL	CAST IRON
TIMER TYPE	3 BUTTON 24 HOUR/ WHITE DISPLAY
OVEN LIGHT	BOTH OVENS
OVEN LINERS: CATALYTIC (C) / ENAMEL (E)	BOTH OVENS: C



## **NEXUS** SE | Induction



Trim: Satin Chrome



3 Ovens

LH - Programmable, multifunctional oven

RHB - Fan oven

RHT - Slow cook oven (80 - 140°)

- Telescopic runners 2 shelves both ovens
- Rapid Response<sup>™</sup>
- Separate deluxe glide-out™ grill with 4-way trivet (dual-circuit)
- Induction hob with 5 cooking zones, including a large central zone and a bridging-zone that can be used as two separate cooking zones, one large cooking zone or a base for the induction griddle that comes with the cooker
- Door-width handles / towel rails
- Three low temperature settings
  - ${\bf L1}~{\it -44}\,^{\circ}{\it C}$ , ideal to melt butter or chocolate
  - **L2** 70°C, to keep prepared food warm
  - L3 94°C, perfect for simmering

#### HOB OPTIONS












SPECIFICATIONS - INDUCTION MODEL	
	NEXUS SE 110
HOB FUEL TYPE	INDUCTION
PRODUCT CODE	NEXSE110EI
WIDTH (mm)	1100
HEIGHT TO HOTPLATE (mm) MIN/MAX	905 / 930
DEPTH EXCLUDING/INCLUDING HANDLES (mm)	608 / 646
WEIGHT (KG – UNPACKED)	150
HOB RATINGS	1.85 / 2.50 kW
kW - KILOWATTS - INDUCTION	1.85 / 2.50 kW
	1.85 / 3.20 kW
	1.85 / 2.50 kW
	1.15 / 2.00 kW
TOTAL HOB RATING (kW)	7.40
ELECTRICAL RATING BRIDGING-ZONE 230V (kW)	1.85
RATED CONNECTED LOAD (kW) @230V	17
RATED CONNECTED LOAD (AMPS)	74.00
THREE-PHASE CONNECTION (AMPS)	3 X 25
ELECTRICAL CONNECTION (AMPS)#	40#
MAXIMUM ELECTRICAL LOAD (kW @ 230V)	17.00
GRILL POWER RATING (kW)	2.30
SEPARATE GRILL	GLIDE-OUT™ (TELESCOPIC)
OVEN TEMPERATURE °C MAX	240 °C
DIMENSIONS – LH OVEN (WxHxD)	466 X 434 X 359
CAPACITY – LH OVEN (LITRES)	79
DIMENSIONS – RH OVEN (WxHXD)	466 X 434 X 359
CAPACITY – RH OVEN (LITRES)	79
OVEN SHELVES (+1 = PLATE RACK)	L: 2 FLAT / R: 2 FLAT
TIMER TYPE	3 BUTTON 24 HOUR/ WHITE DISPLAY
OVEN LIGHT	BOTH OVENS
OVEN LINERS: CATALYTIC (C) / ENAMEL (E)	BOTH OVENS: C

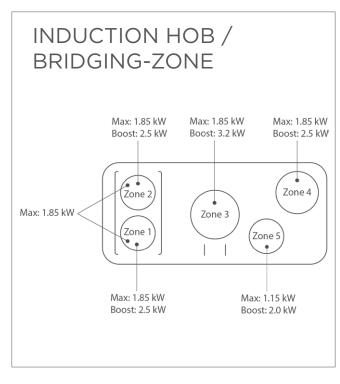





### Distributor / Dealer Information:

Copyright © AGA Rangemaster Limited 2019 Brand names, words and logos are registered trademarks of AGA Rangemaster Limited

Andi-Co Australia 1 Stamford Road, Oakleigh VIC 3166, Australia E-mail: sales@andico.com.au www.andico.com.au/falcor